



THE DELTA 2000 IS A NEW GENERATION ALARM AND COMFORT CONTROL SYSTEM, DESIGNED TO ENHANCE THE SECURITY OF THE FACTORY FITTED TRANSPONDER IMMOBILISER SYSTEM. SANJI HAVE INCORPORATED THE MOST UP TO DATE TECHNOLOGY TO IMPROVE PERFORMANCE AND LONG TERM RELIABILITY. READ THESE INSTRUCTIONS FOR CORRECT SYSTEM OPERATION. ALL POINTS MARKED * ARE OPTIONAL FEATURES.

1) SETTING THE ALARM

TO ENABLE FULL ALARM FEATURES


PRESS THE DOUBLE DOT BUTTON (RIGHT), THE UNIT WILL SOUND 2 SOFT CHIRPS AND THE INDICATORS WILL FLASH TWICE. THE SENSOR WILL SWITCH ON. IF FITTED WITH CENTRAL LOCKING THE DOORS WILL LOCK AND ELECTRIC WINDOWS WILL CLOSE.



2) ALARM DELAY PERIOD

30 SECOND ARMING DELAY PERIOD.


THE DASH LED WILL FLASH RAPIDLY DURING THE 30 SECOND DELAY PERIOD. AFTER THE DELAY THE DASH LED WILL FLASH SLOWLY. NOW THE ALARM IS FULLY SET.

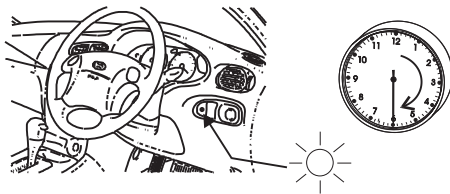

3) SENSOR SHUT DOWN

TO DISABLE THE INTERIOR SENSOR SO THAT A PET OR PERSON CAN REMAIN INSIDE THE VEHICLE WHEN THE ALARM IS ARMED.

PRESS THE RIGHT BUTTON TO SET THE ALARM, THE UNIT WILL SOUND 2 SOFT CHIRPS. PRESS THE RIGHT BUTTON AGAIN, THEN WITHIN 1 SECOND PRESS IT AGAIN. THE UNIT WILL SOUND 3 LOUD CHIRPS.



4) AUTO ZONE BYPASS

TO AUTO-MATICALLY BYPASS A DEFECTIVE ZONE

IF THE UNIT DETECTS A PERMANENTLY FAULTY ZONE IT WILL SOUND 3 TIMES THEN ISOLATE THE FAULTY ZONE.



5) RESETTING THE ALARM

TO RESET FULL ALARM FEATURES

PRESS THE SINGLE DOT BUTTON (LEFT), THE UNIT WILL SOUND 1 SOFT CHIRP AND THE INDICATORS WILL FLASH ONCE. IF FITTED WITH CENTRAL LOCKING THE DOORS WILL UNLOCK.



6) VIOLATION CHIRPS

TO INDICATE TO USER THAT THE ALARM HAS TRIGGERED IN HIS / HER ABSENCE.

ON ALARM RESET THE UNIT WILL SOUND 4 LOUD CHIRPS IF THERE WAS A ZONE TRIGGER DURING ALARM FULLY SET.



7) OVERRIDING THE ALARM



TO RESET THE ALARM IN THE EVENT OF A FLAT REMOTE BATTERY.

IN ALARM SET MODE, OPEN THE DOOR, SIREN WILL SOUND. TURN IGNITION ON, IF THE ALARM SEES A GOOD KEY, THE UNIT WILL RESET. THE UNIT WILL SOUND 4 LOUD CHIRPS.



8) DOOR LOCK ON START

*



AUTOMATIC LOCKING OF ALL DOORS WHEN IGNITION TURNED ON.

ONCE THE IGNITION IS TURNED ON THE DOORS WILL AUTOMATICALLY LOCK AFTER A 1 SECOND DELAY PERIOD. ALL DOORS MUST BE CLOSED.

9) DOOR UNLOCK ON IGNITION
*** OFF**



AUTOMATIC UNLOCKING OF ALL DOORS WHEN IGNITION IS TURNED OFF.

ONCE THE IGNITION IS TURNED OFF ALL THE DOORS WILL AUTOMATICALLY UNLOCK.

10) DOOR LOCK / UNLOCK IN DRIVE



TO LOCK OR UNLOCK THE DOORS FROM THE REMOTE WHILE THE CAR IS RUNNING

PRESS THE SINGLE DOT BUTTON (LEFT) TO UNLOCK THE DOORS. PRESS THE DOUBLE DOT BUTTON (RIGHT) TO LOCK THE DOORS.

11) REMOTE PANIC



TO ENABLE THE SIREN TO SOUND AND THE INDICATORS TO FLASH UNDER EMERGENCY CONDITIONS.

PRESS EITHER BUTTON CONTINUOUSLY FOR 3 SECONDS. ONCE IN PANIC, IT WILL AUTOMATICALLY UNLOCK THE DOORS (IF CONNECTED). YOU CAN DRIVE IN THIS MODE.

12) REMOTE PANIC IN DRIVE



EITHER BUTTON 3 SECONDS

TO ENABLE THE SIREN TO SOUND AND THE INDICATORS TO FLASH UNDER EMERGENCY CONDITIONS WHILE DRIVING.

ONCE IN DRIVE, PRESS EITHER BUTTON CONTINUOUSLY FOR 3 SECONDS. THE SIREN WILL SOUND AND THE INDICATORS WILL FLASH.

13) RESETTING PANIC MODE




TO RESET THE UNIT BACK TO NORMAL OPERATION.

PRESS THE SINGLE DOT BUTTON (LEFT), THE UNIT WILL RESET PANIC AND RETURN TO NORMAL OPERATION.

14) SELECTIVE UNLOCK ON ALARM RESET

TO RESET THE ALARM AND OPEN THE DRIVERS DOOR ONLY.


PRESS THE SINGLE DOT BUTTON, THE UNIT WILL RESET AND SELECTIVELY ONLY OPEN THE DRIVERS DOOR. TO OPEN THE PASSENGER DOORS PRESS THE SINGLE DOT BUTTON AGAIN.



15) SELECTIVE UNLOCK ON IGNITION OFF

TO SELECTIVELY OPEN THE DRIVERS DOOR ONLY, WHEN THE IGNITION IS TURNED OFF.

SWITCH THE IGNITION OFF. ONLY THE DRIVERS DOOR WILL OPEN. TO OPEN THE OTHER DOORS PRESS THE SINGLE DOT ON THE REMOTE.



16) DOME LIGHT SURVEILLANCE

TO LIGHT INTERIOR OF THE VEHICLE ON ALARM RESET.

ON ALARM RESET OR WHEN IGNITION IS TURNED OFF, THE INTERIOR DOME LIGHT WILL SWITCH ON. IT WILL AUTOMATICALLY SWITCH OFF AFTER 55 SECONDS, OR WHEN THE ALARM IS SET OR THE IGNITION IS TURNED ON.



17) SETTING HI-JACK SERVICE MODE

TO TEMPORARILY DISABLE HI-JACK FOR VEHICLE SERVICE.

IN DRIVE, PRESS THE HIDDEN BUTTON FOR 5 SECONDS. THE SIREN WILL CHIRP ONCE, THE UNIT WILL ENTER SERVICE MODE.



18) OPERATION IN HI-JACK SERVICE MODE

USER WARNING THAT THE UNIT IS IN SERVICE MODE.

IF THE DRIVERS DOOR IS OPENED THEN CLOSED, YOU WILL HEAR A CHIRP, UNIT WILL NOT ENTER HI-JACK.



19) RESETTING HI-JACK SERVICE MODE

TO CANCEL HI-JACK SERVICE MODE

IN DRIVE, PRESS THE HIDDEN BUTTON FOR 5 SECONDS, THE SIREN WILL SOUND TWO CHIRPS. THE UNIT WILL NOW RESUME NORMAL HI-JACK OPERATION.



20) ACTIVATING HI JACK MODE

TO ACTIVATE HI JACK MODE

IN DRIVE OPEN THEN CLOSE DRIVERS DOOR. IF ALL DOORS ,BONNET AND BOOT ARE CLOSED THE DASH LED WILL GIVE A 1 SECOND PULSE. THE UNIT IS NOW ENTER THE COUNTDOWN PHASE.



21) RESETTING THE HI JACK DURING THE COUNT DOWN PHASE

TO RESET THE UNIT BACK TO NORMAL DRIVE MODE.

PRESS THE HIDDEN PUSH BUTTON AT ANY TIME FOR 3 SECONDS, THE UNIT WILL CHIRP FOUR TIMES, THE SYSTEM WILL EXIT HI JACK MODE AND RESUME NORMAL OPERATION.

*



22) HI JACK FINAL PHASE

TO CONFIRM WHAT PHASE THE UNIT IS IN.

IN FINAL HI JACK, THE SIREN WILL SOUND ON AND OFF AT 5 SECOND INTERVALS. WHEN THE IGNITION IS TURNED OFF, THE VEHICLE WILL BE BE IMMOBILISED. THE UNIT CAN BE RESET BY PUSHING THE HIDDEN BUTTON FOR 3 SECONDS, THE UNIT WILL CHIRP FOUR TIMES.

*



23) HI JACK MODE INDICATION

TO CONFIRM THAT THE UNIT IS IN HI-JACK MODE.

TO CONFIRM THAT THE UNIT IS IN HI JACK MODE, TURN THE IGNITION OFF, PRESS THE DOUBLE DOT BUTTON, UNIT WILL SOUND FOUR CHIRPS.

*



24) REMOTE BATTERIES

BATTERY REPLACEMENT

THE NORMAL LIFE OF THE LITHIUM BATTERY'S ARE 3 TO 5 YEARS. IN THE EVENT OF THE REMOTE LED NOT LIGHTING WHEN ACTIVATED , REPLACE THE BATTERIES. REPLACEMENT BATTERIES - 2 X CR1220



25) SET / RESET CHIRPS

TO REMOVE THE SET AND RESET CHIRPS

WHEN SETTING AND RESETTING THE ALARM THE CHIRPS WILL REMAIN SILENT. ALL OTHER CHIRPS WILL REMAIN OPERATIONAL. CONTACT YOUR LOCAL DEALER.

*

