

\* VESA approved when fitted by a VESA member in accordance with the latest VESA specifications and issued with an authentic VESA certificate.

# USER INSTRUCTIONS

## ZX60-X

### Touch Key Immobiliser

FITMENT CENTRE STAMP:

ZX60-X-USER-REV0

Specifications subject to change without notice.

## ZX60-X

ISO9001  
Quality Company



SANJI SECURITY SYSTEMS (PTY) LTD  
106 16TH ST MIDRAND GAUTENG, SOUTH AFRICA  
TEL +27 11 266 7500 FAX +27 11 266 7501  
E Mail : sales@sanji.co.za http://www.sanji.co.za



IF YOU ENTER AN INCORRECT DIGIT THE LED WILL GO ON SOLID, THE UNIT WILL REVERT BACK TO THE FIRST DIGIT.

### 5) USING YOUR PERSONALISED PIN CODE TO OVERRIDE YOUR VEHICLE

THE UNIT WILL BE IMMOBILISED (DASH LED FLASHING). ASSUMING YOUR CODE IS '21341'.

#### DIGIT 1

TURN IGNITION KEY ON, LED WILL GO SOLID FOR 3 SECONDS THEN START TO FLASH, ON THE SECOND FLASH, TURN IGNITION KEY OFF, THE LED WILL GO OFF. YOU HAVE NOW SUCCESSFULLY PUT YOUR FIRST DIGIT IN.

#### DIGIT 2

TURN IGNITION KEY ON, LED WILL START TO FLASH, AFTER THE FIRST FLASH, TURN IGNITION KEY OFF, THE LED WILL GO OFF, YOU HAVE NOW SUCCESSFULLY PUT YOUR SECOND DIGIT IN.

#### DIGIT 3

TURN IGNITION KEY ON, LED WILL START TO FLASH, AFTER THE THIRD FLASH, TURN IGNITION KEY OFF, THE LED WILL GO OFF, YOU HAVE NOW SUCCESSFULLY PUT YOUR THIRD DIGIT IN.

#### DIGIT 4

TURN IGNITION KEY ON, LED WILL START TO FLASH, AFTER THE FOURTH FLASH, TURN IGNITION KEY OFF, THE LED WILL GO OFF, YOU HAVE NOW SUCCESSFULLY PUT YOUR FOURTH DIGIT IN.

#### DIGIT 5

TURN IGNITION KEY ON, LED WILL START TO FLASH, AFTER THE FIRST FLASH, TURN IGNITION KEY OFF, THE LED WILL GO OFF, YOU HAVE NOW SUCCESSFULLY PUT YOUR FIFTH DIGIT IN. YOU HAVE NOW SUCCESSFULLY ENTERED YOUR PIN CODE OVERRIDE. YOU CAN NOW DRIVE YOUR VEHICLE.

ENTERING YOUR 5 DIGIT PIN CODE

CORRECT DIGIT ENTERED GO TO NEXT DIGIT

TURN IGNITION ON COUNT DASH LED PULSES

TURN IGNITION OFF

LED OFF


LED ON

INCORRECT DIGIT ENTERED GO BACK TO RE-ENTER FIRST DIGIT

LED OFF

SYSTEM RESET

VEHICLE OVERRIDE SUCCESSFUL

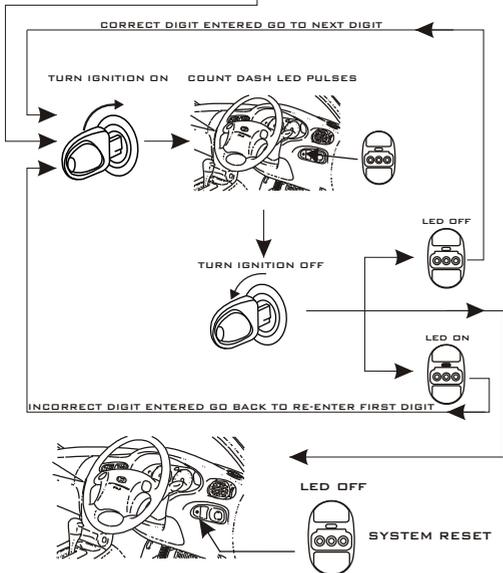

# ZX60-X

## 4) PIN CODE FACILITY

### IMPORTANT!

THE ZX55 IS A NEW GENERATION OF IMMOBILISERS. SANJI HAVE INCORPORATED THE MOST UP TO DATE TECHNOLOGY TO IMPROVE SECURITY, LONG TERM PERFORMANCE AND RELIABILITY. THE ZX55 IS MANUFACTURED TO FULL INTERNATIONAL ISO 9001 AND SABS QUALITY STANDARDS. IT IS VESA LEVEL 3A TESTED AND APPROVED BY VESA WHEN INSTALLED BY A VESA APPROVED INSTALLATION CENTRE.


IF YOU RESET THE IMMOBILISER AND TURN THE IGNITION ON TO DRIVE, IF THE DASH LED IS ON SOLID THEN YOUR 5 DIGIT CODE HAS NOT BEEN READ OUT. FOLLOW THE PROCEDURE BELOW TO READ OUT YOUR 5 DIGIT UNIQUE PINCODE :

READ THESE INSTRUCTIONS FOR CORRECT SYSTEM OPERATION. ALL POINTS MARKED ★ ARE OPTIONAL FEATURES.

**NB! HAVE A PEN AND PAPER HANDY**


### 1) IMMOBILISER ARMED

THE LED ON THE TOUCH HEAD WILL FLASH INDICATING TO THE USER THAT THE VEHICLE IS IMMOBILISED.




### 2) RESETTING THE IMMOBILISER

TAKE YOUR TOUCH KEY AND PLACE IT INTO THE TOUCH HEAD, THE LED WILL TURN OFF, THE VEHICLE CAN NOW BE DRIVEN.

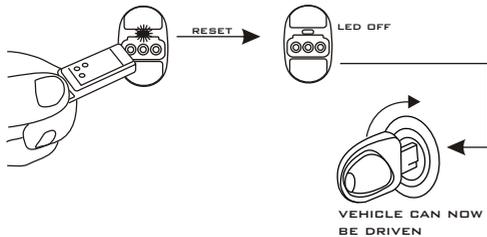


### 3) IMMOBILISER DELAY PERIOD


AFTER RESETTNG THE IMMOBILISER OR TURNING IGNITION OFF FROM DRIVE, THERE WILL BE A DELAY PERIOD OF 60 SECONDS. AFTER THE DELAY PERIOD THE VEHICLE WILL BE IMMOBILISED.

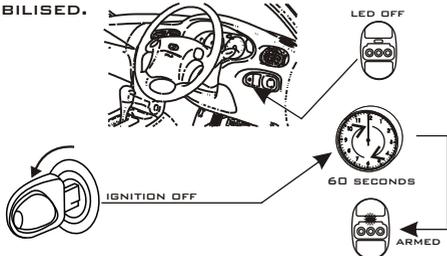

A) RESET THE IMMOBILISER AND TURN THE IGNITION ON.

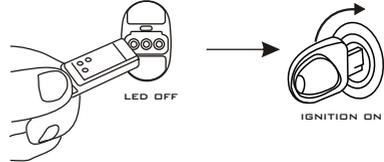

B) THE LED WILL BE ON, PLACE THE KEY INTO THE TOUCH HEAD, THE LED WILL THEN TURN OFF.



C) AFTER 4 SECONDS THE LED WILL START TO FLASH, COUNT THE FLASHES, WHEN IT STOPS FLASHING WRITE THE NUMBER DOWN ON A PIECE OF PAPER.



D) WAIT FOR THE LED TO START FLASHING AGAIN, COUNT THE FLASHES, WHEN IT STOPS FLASHING WRITE THE NUMBER DOWN.



E) REPEAT STEP (D) UNTIL ALL 5 DIGITS HAVE BEEN READ OUT.

F) REPEAT STEP (B) TO (E) TO VERIFY THAT YOU READ YOUR CODE OUT CORRECTLY.

G) ONCE YOU HAVE READ OUT THE PINCODE TWICE, THE LED WILL TURN OFF. WRITE THE PINCODE IN THE BLOCKS ON THE RED PIN CODE CARD SUPPLIED.

H) DO NOT LEAVE THE PIN CODE CARD IN THE VEHICLE.